


Diesel Engine Fire Pump Controller - Accessory

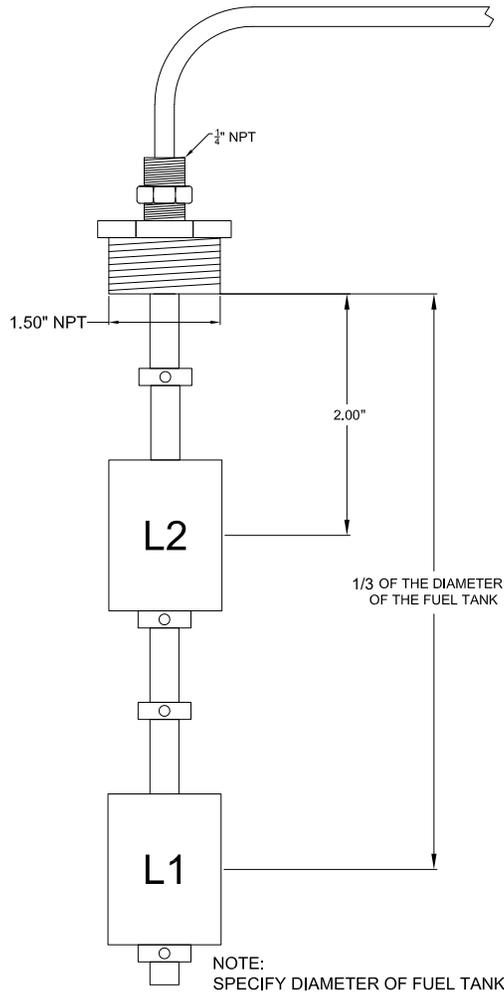


NOTE:  
SPECIFY DIAMETER OF FUEL TANK

Float Switch Connections


Contact Rating:  
Maximum 250V, 20W  
(Switch REED)  
Pilot Duty Switch

Float Switch Configuration

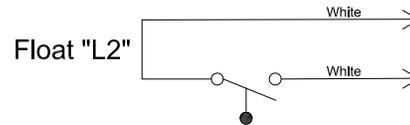


Float "L2"

The contact is OPEN when  
float is above the liquid  
level.

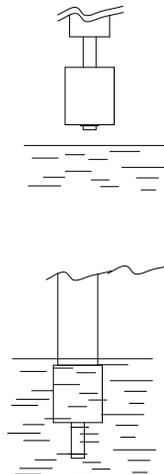

The contact is CLOSED  
when the float is in the  
liquid

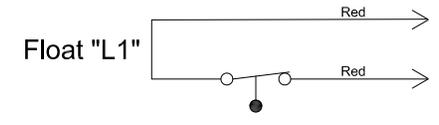

Float "L1"

The contact is CLOSED  
when float is above the  
liquid level.

The contact is OPEN when  
the float is in the liquid

REVISED DIMENSIONS L1 & L2		A	-	CIR	CIR	4-8-20
RELEASED		-	-	CIR	CIR	2-6-20
REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE
DIMENSIONS & WEIGHT		FTA1100-K26B		DRAWING NUMBER		
COMBINED LOW AND HIGH FUEL LEVEL SWITCH FLOAT 1.50"		DD1100-K26B		SHEET 1 OF 1		
DWG REV	A	ECN NO	-			

THIRD ANGLE PROJECTION	SIZE	A	BY	CIR	DATE	2-6-20
	DRAWN BY	CIR	DATE	2-6-20		
	FINAL APPROVAL	CIR	DATE	2-6-20		



© Firetrol, Inc. Not for construction.  
Subject to change without notice.