


Low Fuel Level Switch




FTA1100


Diesel Engine Fire Pump Controller - Accessory

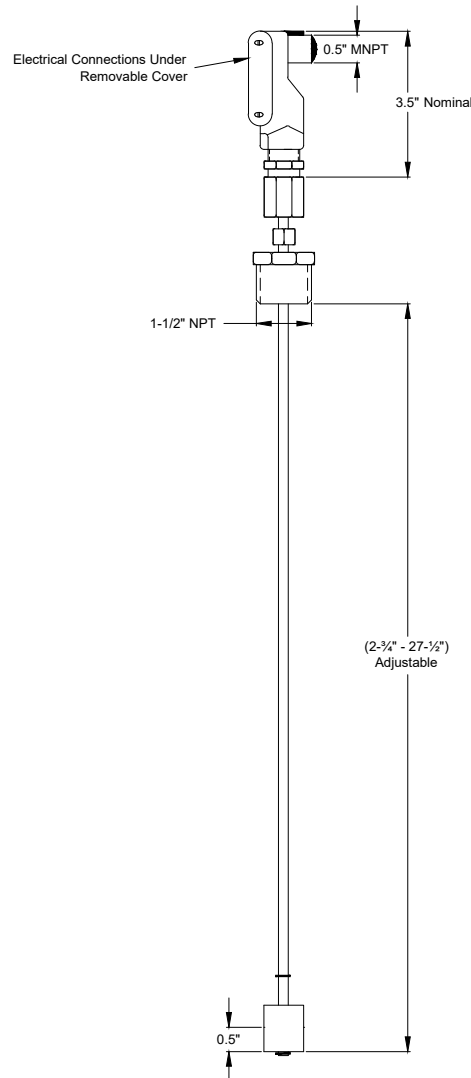

Float Switch Configuration




The contact is CLOSED when float is above the liquid level.



The contact is OPEN when the float is in the liquid

How to invert a normally open contact to a normally closed contact

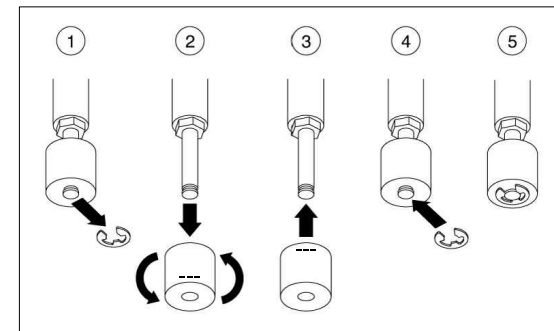

Contact Rating:
Maximum 250V, 20W
(Switch REED)
Pilot Duty Switch

Instructions:

- Fitting Size: 1-1/2" NPT
- Length of Assembly: 2-3/4" - 27-1/2"
- Diameter of Switch: 1-1/2"

 THIRD ANGLE PROJECTION	SIZE	A	BY	CIR	DATE	2-6-20
	DRAWN BY	CIR	2-6-20			
	FINAL APPROVAL	CIR	2-6-20			



© Firetrol, Inc. Not for construction.
Subject to change without notice.

RELEASED	-	-	CIR	CIR	2-6-20
REVISION DESCRIPTION	REV	ECN NO	BY	APP	DATE
DIMENSIONS & WEIGHT	FTA1100-K7B		DRAWING NUMBER		
LOW FUEL LEVEL SWITCH FLOAT 1.50"			DD1100-K7B		
DWG REV	-	ECN NO	-	SHEET 1 OF 1	