


High Fuel Level Switch





FTA1100

Diesel Engine Fire Pump Controller - Accessory

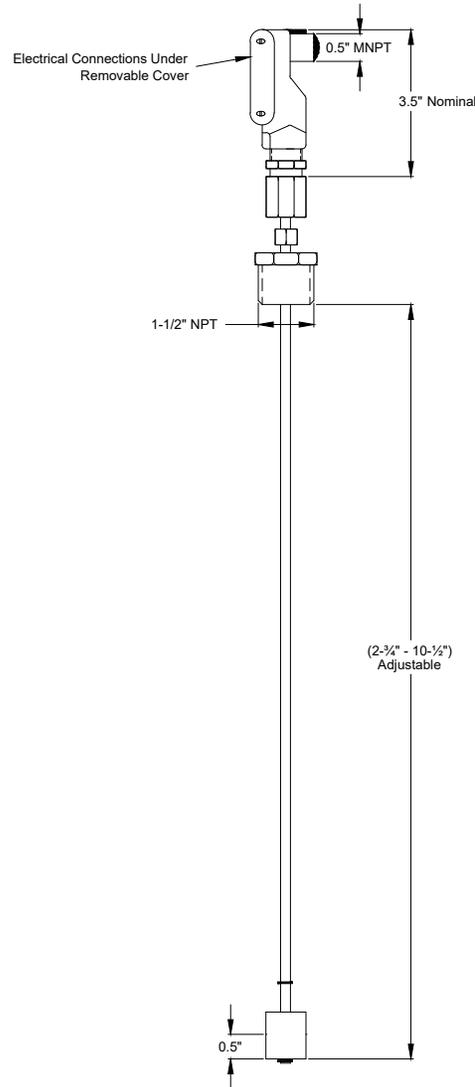


Float Switch Configuration

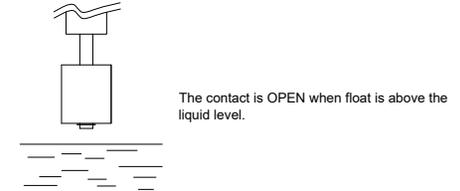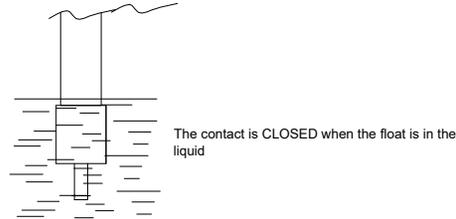

Contact Rating:
Maximum 250V, 20W
(Switch REED)
Pilot Duty Switch

- Instructions:
- Fitting Size: 1-1/2" NPT
 - Length of Assembly: 2-3/4" - 10-1/2"
 - Diameter of Switch: 1-1/2"

How to invert a normally open contact to a normally closed contact

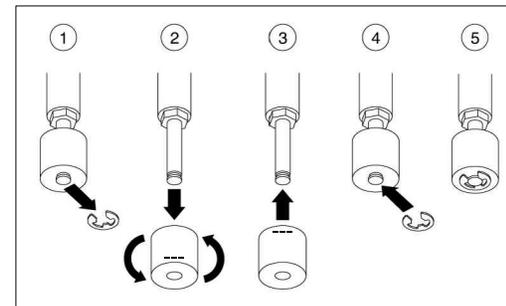

THIRD ANGLE PROJECTION	SIZE	A	BY	CIR	DATE	2-6-20
	DRAWN BY	CIR	DATE	2-6-20		
	FINAL APPROVAL	CIR	DATE	2-6-20		

Firetrol, Inc.

© Firetrol, Inc. Not for construction. Subject to change without notice.

RELEASED	-	-	CIR	CIR	2-6-20
REVISION DESCRIPTION	REV	ECN NO	BY	APP	DATE
DIMENSIONS & WEIGHT	FTA1100-K8B		DRAWING NUMBER		
HIGH FUEL LEVEL SWITCH FLOAT 1.50"	DD1100-K8B				
DWG REV	-	ECN NO	-	SHEET 1 OF 1	

All rights reserved. The drawing and the information contained or depicted herein are the sole property of Firetrol, Inc. Copies are communicated to the recipient in strict confidence and may not be retransmitted, published, reproduced, copied or used in any manner, including as the basis for the manufacture or sale of any products, without the express prior written consent of Firetrol, Inc.