



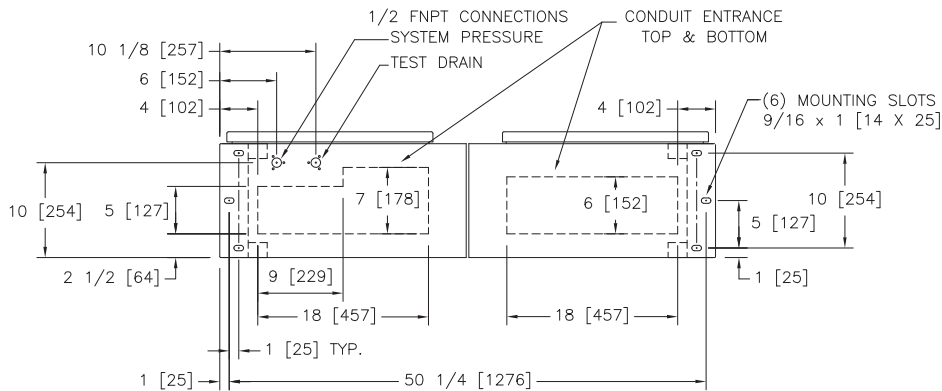

Mark IIx6 Electric Fire Pump Controllers

Dimensions and Shipping Weight FTA1250/950 Part Winding Starting With Power Transfer Switch

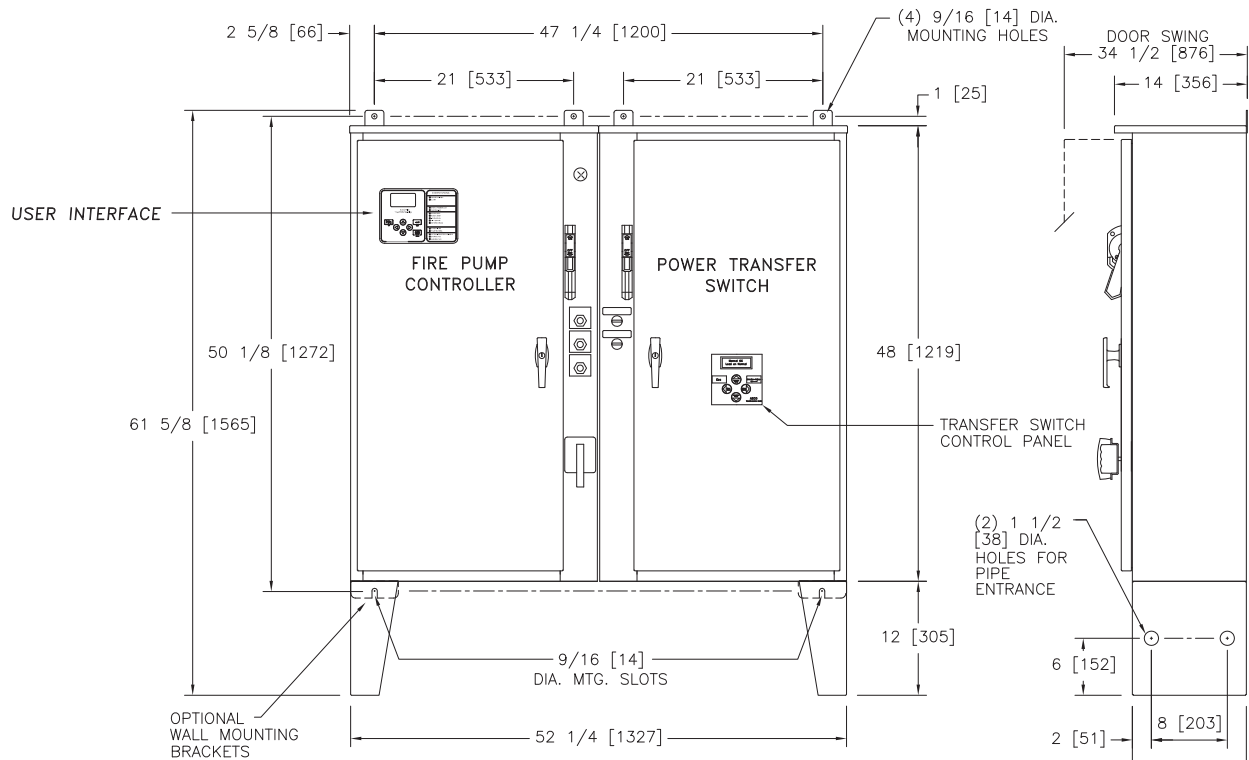

STANDARD WITHSTAND RATINGS	
200-600V	100,000 Amps RMS Sym.
INTERMEDIATE WITHSTAND RATINGS	
200-600V	150,000 Amps RMS Sym.
HIGH WITHSTAND RATINGS	
200-600V	200,000 Amps RMS Sym.
LINE VOLTAGE	MOTOR HORSEPOWER
200	□ 3-60
208	□ 3-60
220-240	□ 3-60
380-415	□ 3-100
440-480	□ 3-150
550-600	□ 3-150

APPROXIMATE SHIPPING WEIGHT
510 [231]

DO NOT INSTALL IN AMBIENT TEMPERATURES BELOW 41°F [5°C].

ALL DIMENSIONS - INCHES [MM]
SHIPPING WEIGHT - POUNDS [KG]

THIS DIMENSION DRAWING COVERS FTA1250 CONTROLLERS AT THE HORSEPOWER, VOLTAGE AND WITHSTAND RATINGS AS LISTED IN THE TABLE. FOR OTHER HORSEPOWER OR WITHSTAND RATINGS, REFER TO ED1250-02

SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION. REQUEST CONSTRUCTION DRAWINGS FROM FIRETROL OR YOUR LOCAL FIRETROL REPRESENTATIVE.

	SIZE	A	BY	DATE
	DRAWN BY	TEF	07-08-02	
	FINAL APPROVAL	TEF	07-08-02	



© Firetrol, Inc. Not for construction. Subject to change without notice.

UPDATED TITLE BLOCK		C	280598	JMW	TEF	09-04-19
ADDED COMPONENTS TO MEET FM REQUIREMENTS		B	228549	JC	TEF	08-10-10
REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE
DIMENSIONS & SHIPPING WEIGHT		FTA1250 WITH FTA950		DRAWING NUMBER		
PART WINDING FIRE PUMP CONTROLLER WITH POWER TRANSFER SWITCH		DD1250-61				
DWG REV	C	ECN NO	280598	SHEET 1 OF		