


Dimensions and Shipping Weight



FTA1250

MARK^{III} Electric Fire Pump Controllers - Part Winding Starting

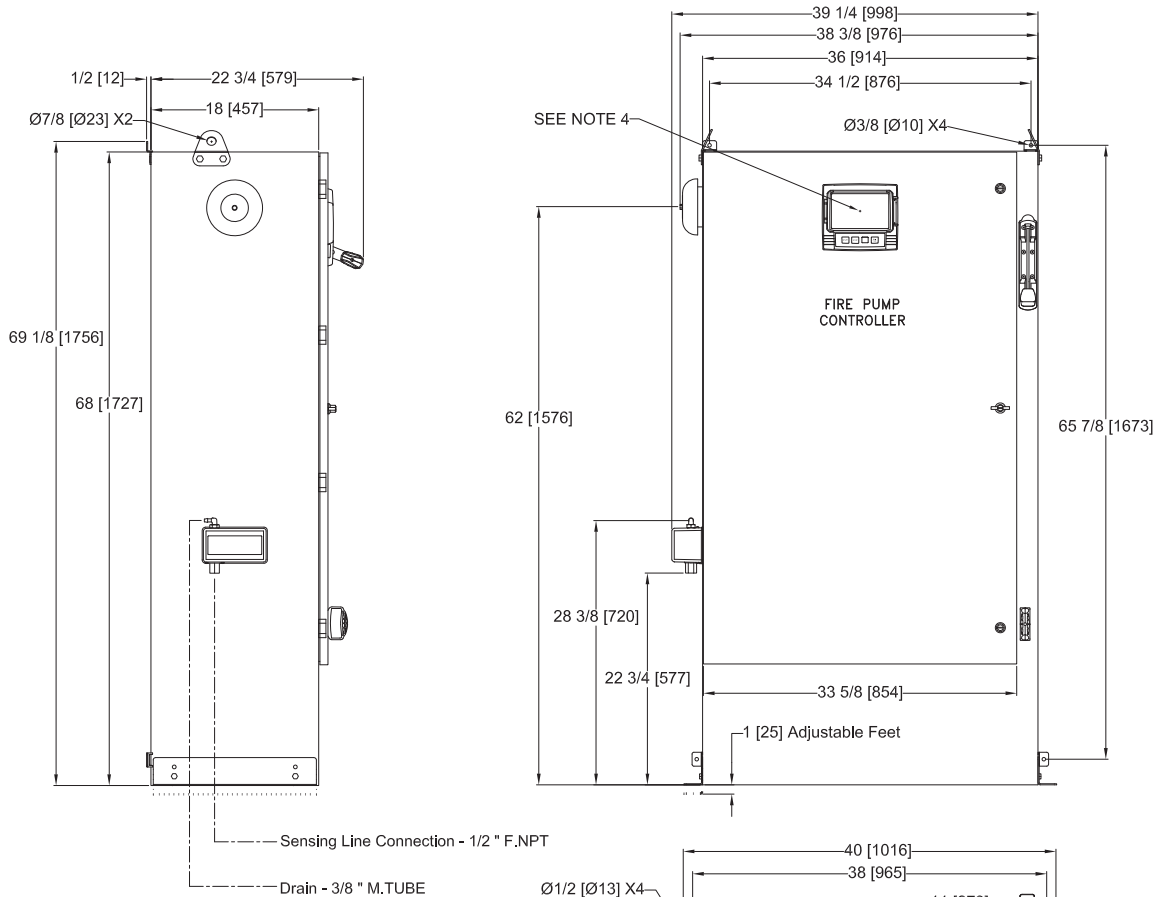

NOTE:
DRAIN CONNECTION MUST BE PIPED TO WASTE DRAIN. FAILURE TO CONNECT TO A FLOOR DRAIN WILL RESULT IN UNSAFE CONDITIONS OF STANDING WATER AROUND CONTROLLER.

- NOTES:
1. STANDARD: NEMA 2
 2. STANDARD PAINT: TEXTURED RED RAL3002
 3. ALL DIMENSIONS IN INCHES [MILLIMETERS]
SHIPPING WEIGHT IN POUNDS [KG]
 4. CENTER OF MARK III SCREEN: 61 5/8 [1564] FROM BOTTOM OF ENCLOSURE
 5. BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
 6. USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
 7. PROTECT EQUIPMENT AGAINST DRILLING CHIPS
 8. DOOR SWING EQUAL TO DOOR WIDTH
 9. DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
 10. SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

VOLTAGE/POWER TABLE	
LINE VOLTAGE	MOTOR HORSEPOWER
208	200
220-240	250
380-400-415	350-450
440-480	450-500
600	NA
APPROX SHIPPING WT: 450 [204]	

THIRD ANGLE PROJECTION	SIZE A	BY	DATE	REVISED VOLTAGE/POWER CHART		A	-	CIR	CIR	11-5-19
				REV	ECN NO	BY	APP	DATE		
	DRAWN BY	CIR	11-5-19	DIMENSIONS & SHIPPING WEIGHT		FTA1250		DRAWING NUMBER		
	FINAL APPROVAL	CIR	11-5-19	PART WINDING FIRE PUMP CONTROLLER		DD1250-73			CDL	
				DWG REV	A	ECN NO	-	SHEET 1 OF 1		



© Firetrol, Inc. Not for construction. Subject to change without notice.