


Dimensions and Shipping Weight



FTA1250/950

MARK^{III} Electric Fire Pump Controllers – Part Winding Starting With Power Transfer Switch

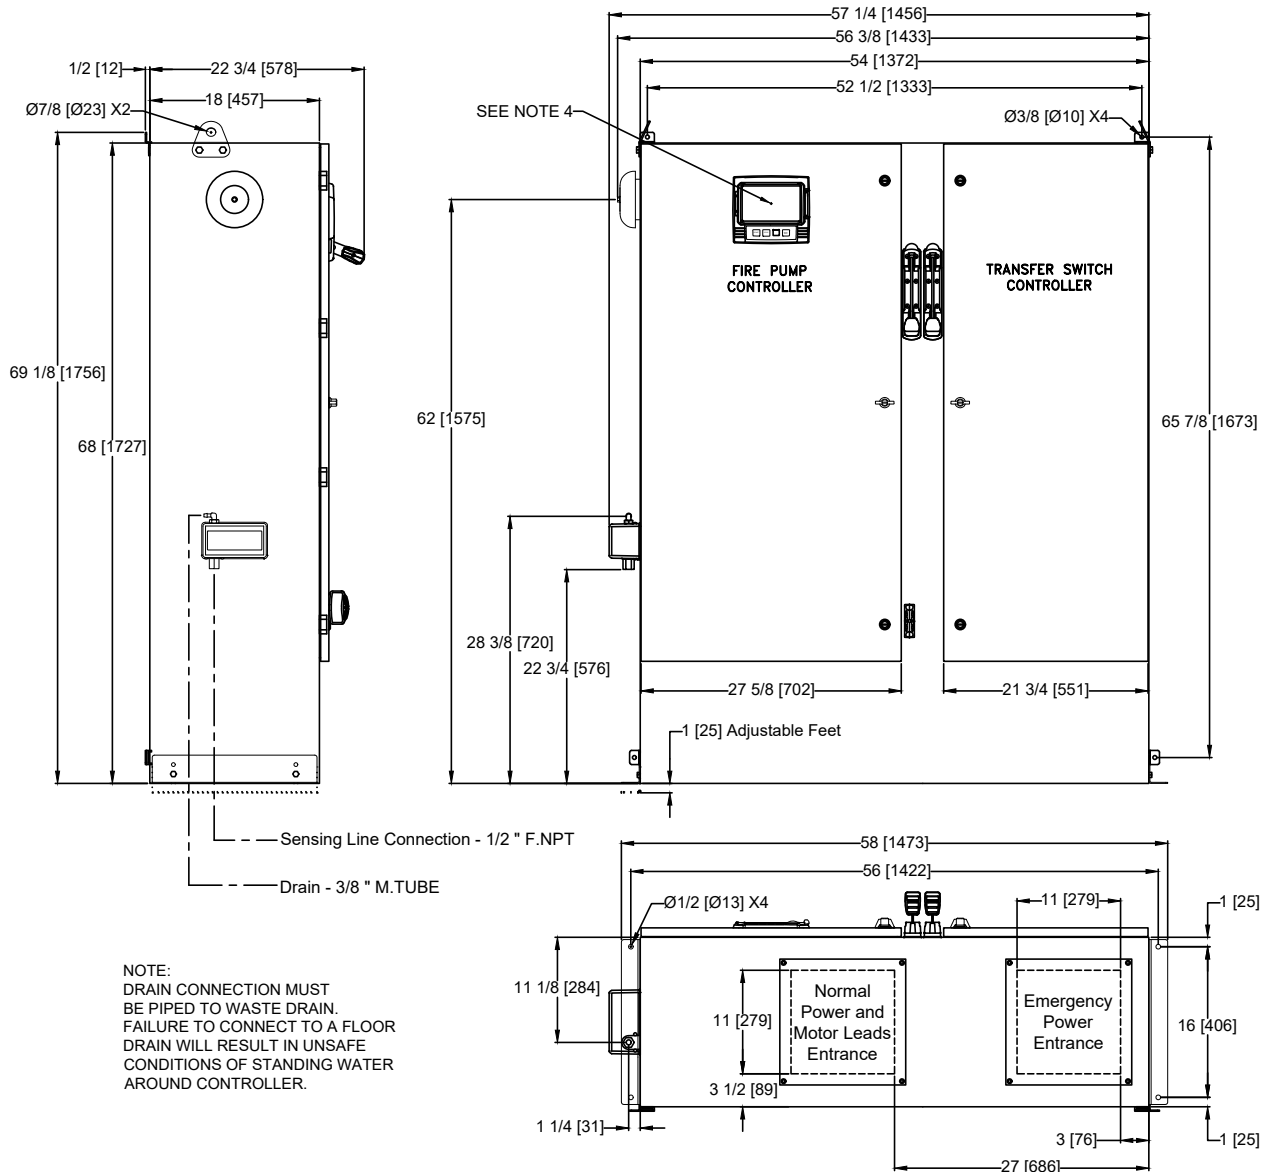

NOTE:
DRAIN CONNECTION MUST BE PIPED TO WASTE DRAIN. FAILURE TO CONNECT TO A FLOOR DRAIN WILL RESULT IN UNSAFE CONDITIONS OF STANDING WATER AROUND CONTROLLER.

LINE VOLTAGE	MOTOR HORSEPOWER
208	75-100
220-240	100-125
380-400-415	150-200
440-480	200-250
600	250-350
APPROX SHIPPING WT: 650 [295]	

- NOTES:
- STANDARD: NEMA 2
 - STANDARD PAINT: TEXTURED RED RAL3002
 - ALL DIMENSIONS IN INCHES [MILLIMETERS] SHIPPING WEIGHT IN POUNDS [KG]
 - CENTER OF MARK III SCREEN: 61 5/8 [1564] FROM BOTTOM OF ENCLOSURE
 - BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
 - USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
 - PROTECT EQUIPMENT AGAINST DRILLING CHIPS
 - DOOR SWING EQUAL TO DOOR WIDTH
 - DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
 - SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

	SIZE A	BY	DATE	REVISED VOLTAGE/POWER CHART			B	-	CIR	CIR	1-19-21
	DRAWN BY	CIR	11-5-19	REVISION DESCRIPTION			REV	ECN NO	BY	APP	DATE
	FINAL APPROVAL	CIR	11-5-19	DIMENSIONS & SHIPPING WEIGHT			FTA1250 WITH FTA950		DRAWING NUMBER		
				PART WINDING FIRE PUMP CONTROLLER AND POWER TRANSFER SWITCH			DD1250-82			CDL	
						DWG REV	B	ECN NO	-	SHEET 1 OF 1	



© Firetrol, Inc. Not for construction. Subject to change without notice.