


## Mark Ilxg Electric Fire Pump Controllers

## Dimensions and Shipping Weight

FTA1300 / FTA950
Wye-Delta Open Transition Starting
With Power Transfer Switch

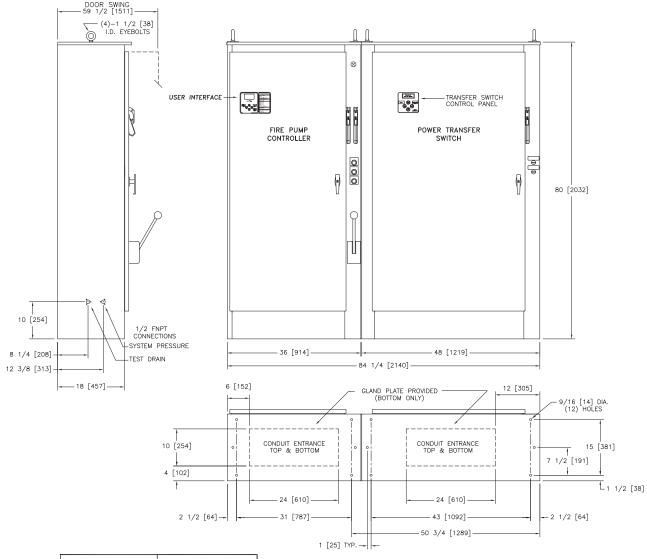

STANDARD WITHSTAND RATINGS 200-600V 100,000 Amps RMS Sym. INTERMEDIATE WITHSTAND RATINGS 200-600V 150,000 Amps RMS Sym. HIGH

WITHSTAND RATINGS 200-600V 200,000 Amps RMS Sym.

WITHSTAND RATINGS 200-480V 65,000 Amps RMS Sym. STANDARD LOW
WITHSTAND RATINGS
550-600V
42,000 Amps RMS Sym.

STANDARD INTERMEDIATE

LINE VOLTAGE	MOTOR HORSEPOWER	MOTOR HORSEPOWER
200	□ 125-200	□ 250
208	□ 150-200	□ 250
220-240	□ 150-250	□ 300
380-415	□ 250−350	□ 400-500
440-480	□ 300-500	□ 600
550-600	□ 350-500	

APPROXIMATE SHIPPING WEIGHT 1575 [714]

DO NOT INSTALL IN AMBIENT TEMPERATURES BELOW 41°F [5°C].

ALL DIMENSIONS - INCHES [MM] SHIPPING WEIGHT - POUNDS [KG]

THIS DIMENSION DRAWING COVERS FTA1300 CONTROLLERS AT THE HORSEPOWER, VOLTAGE AND WITHSTAND RATINGS AS LISTED IN THE TABLE. FOR OTHER HORSEPOWER OR WITHSTAND RATINGS, REFER TO ED1300-02

SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION. REQUEST CONSTRUCTION DRAWINGS FROM FIRETROL OR YOUR LOCAL FIRETROL REPRESENTATIVE.

	SIZE A	BY	DATE
THIRD ANGLE PROJECTION	DRAWN BY	TEF	07-24-02
	FINAL APPROVAL	TEF	07-24-02



	UPDATED TITLE BLOCK		E	280820	JMW	TEF	09-13-19	
REVISED MOTOR HORSEPOWER CHART			D	237364	JMW	TEF	05-31-12	
	REVISION DESCRIPTION			ECN NO	BY	APP	DATE	
	DIMENSIONS & SHIPPING WEIGHT	FTA1300 WITH FTA950		DD1300-65				
	OPEN TRANSITION WYE-DELTA FIRE PUMP CONTROLLER		DD 1300 <del>-</del> 03					
	WITH POWER TRANSFER SWITCH		DWG E	ECN 280	0820	SI	HEET 1 OF 1	