


MARKIII Electric Fire Pump Controllers - Wye-Delta Open Transition Starting

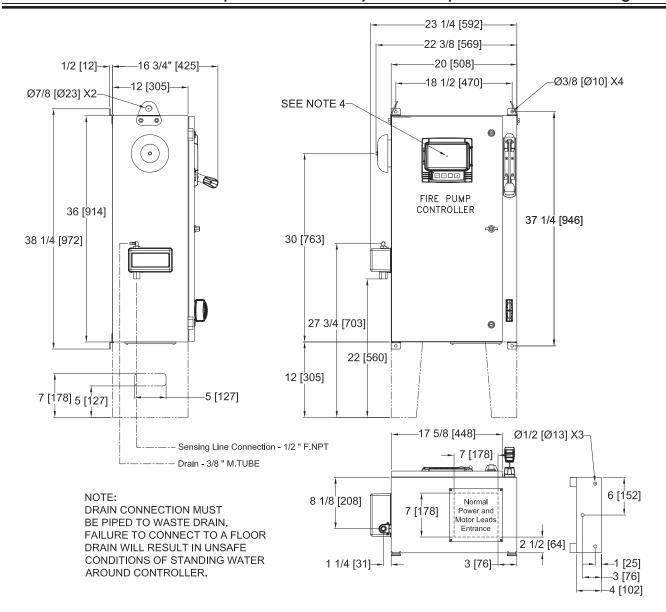

VOLTAGE/POWER TABLE						
LINE	MOTOR					
VOLTAGE	HORSEPOWER					
208	5-30					
220-240	5-30					
380-400-415	5-60					
440-480	5-60					
600	5-75					
APPROX SHIPPING WT: 170 [77]						

NOTES:

- 1. STANDARD: NEMA 2
- 2. STANDARD PAINT: TEXTURED RED RAL3002
- 3. ALL DIMENSIONS IN INCHES [MILLIMETERS] SHIPPING WEIGHT IN POUNDS [KG]
- 4. CENTER OF MARK III SCREEN: 29 5/8 [751] FROM **BOTTOM OF ENCLOSURE**
- 5. BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
- 6. USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
- 7. PROTECT EQUIPMENT AGAINST DRILLING CHIPS
- 8. DOOR SWING EQUAL TO DOOR WIDTH
- 9. DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
- 10. SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

					RELEASED		-	-	CIR	CIR	11-5-19
THIRD ANGLE PROJECTION	SIZE A	BY	DATE		REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE
	DRAWN BY (CIR 11-5-19			DIMENSIONS & SHIPPING WEIGHT	FTA1300	DRAWING NUMBER				
			11-5-19		OPEN TRANSITION WYE DELTA FIRE PUMP CONTROLLER		– DD1300 - 70				CDL
	FINAL APPROVAL	CIR	11-5-19	© Firetrol, Inc. Not for construction. Subject to change without notice.			DWG REV -	ECN -		SH	HEET 1 OF 1
All rights reserved, The drawing and the information contained or depicted herein are the sole property of Firetrol, Inc. Copies are communicated to the recipient in strict confidence and may not be retransmitted, published, reproduced, copied or used in any manor, including as the basis for the manufacture or sale of any products, without the express prior written consent of Firetrol, Inc.											