


Dimensions and Shipping Weight




FTA1300/950

MARK^{III} Electric Fire Pump Controllers - Wye-Delta Open Transition Starting With Power Transfer Switch

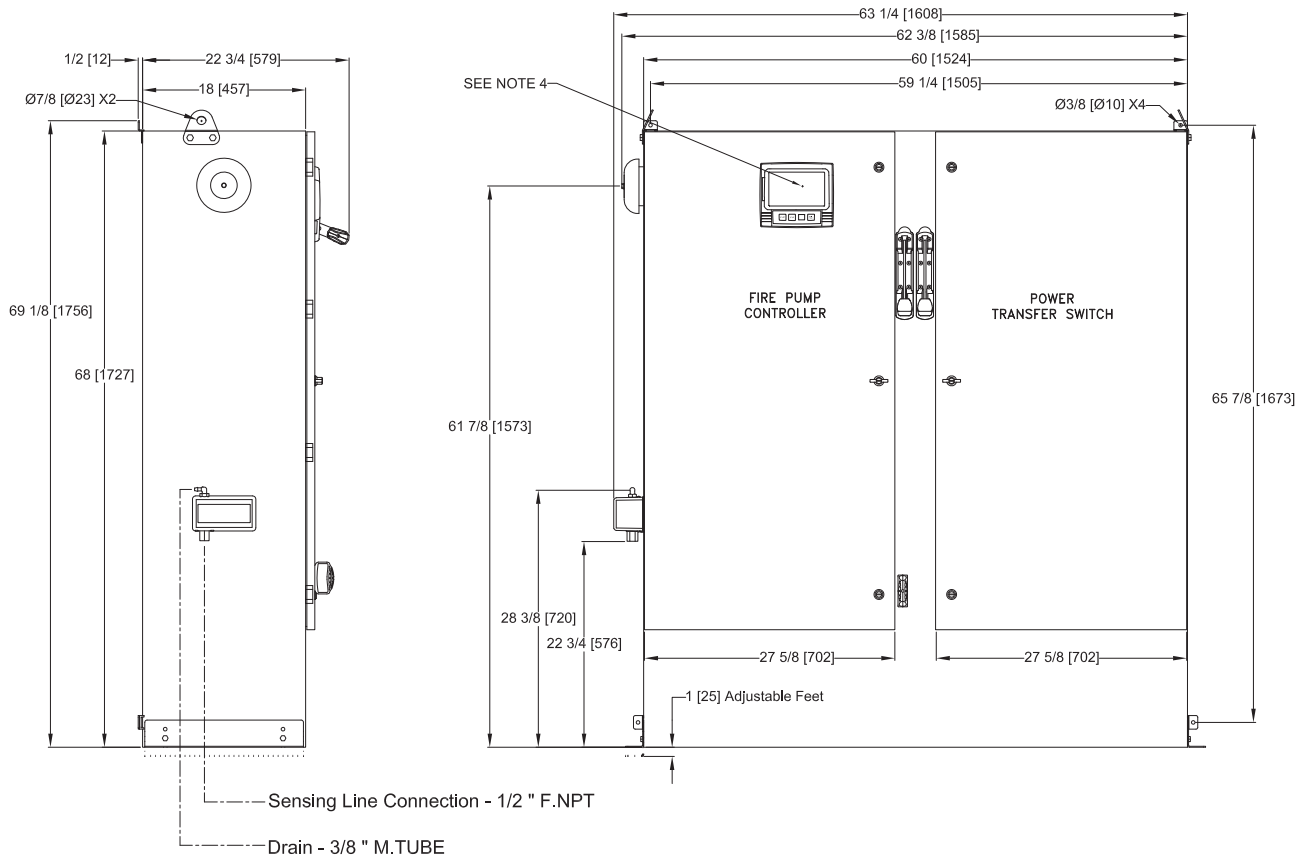

NOTE:
DRAIN CONNECTION MUST
BE PIPED TO WASTE DRAIN.
FAILURE TO CONNECT TO A FLOOR
DRAIN WILL RESULT IN UNSAFE
CONDITIONS OF STANDING WATER
AROUND CONTROLLER.

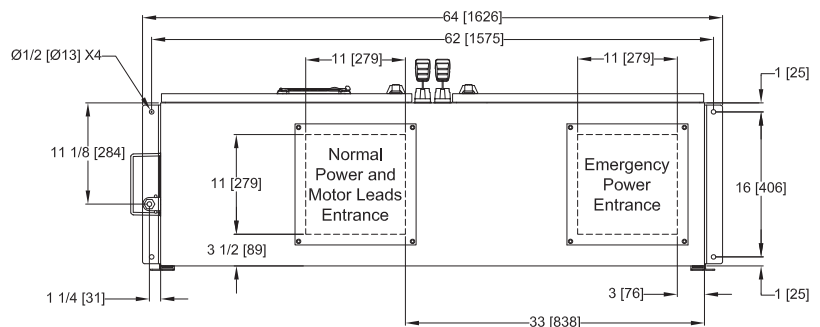

VOLTAGE/POWER TABLE

LINE VOLTAGE	MOTOR HORSEPOWER
208	125-150
220-240	150-200
380-400-415	250-300
440-480	300-400
600	400-500
APPROX SHIPPING WT: 900 [408]	

NOTES:

1. STANDARD: NEMA 2
2. STANDARD PAINT: TEXTURED RED RAL3002
3. ALL DIMENSIONS IN INCHES [MILLIMETERS]
SHIPPING WEIGHT IN POUNDS [KG]
4. CENTER OF MARK III SCREEN: 61 5/8 [1564] FROM
BOTTOM OF ENCLOSURE
5. BOTTOM CONDUIT ENTRANCE THROUGH
REMOVABLE GLAND PLATE RECOMMENDED
6. USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
7. PROTECT EQUIPMENT AGAINST DRILLING CHIPS
8. DOOR SWING EQUAL TO DOOR WIDTH
9. DRAWINGS FOR CONSTRUCTION PURPOSES
MUST BE OBTAINED FROM FIRETROL OR THE LOCAL
FIRETROL REPRESENTATIVE
10. SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

REVISED VOLTAGE/POWER CHART				A	-	CIR	CIR	5-12-20
REVISION DESCRIPTION				REV	ECN NO	BY	APP	DATE
DIMENSIONS & SHIPPING WEIGHT				FTA1300 WITH FTA950				
OPEN TRANSITION WYE DELTA FIRE PUMP CONTROLLER AND POWER TRANSFER SWITCH				DRAWING NUMBER DD1300-83				
				DWG REV	A	ECN NO	-	SHEET 1 OF 1

All rights reserved. The drawing and the information contained or depicted herein are the sole property of Firetrol, Inc. Copies are communicated to the recipient in strict confidence and may not be retransmitted, published, reproduced, copied or used in any manner, including as the basis for the manufacture or sale of any products, without the express prior written consent of Firetrol, Inc.