


MARKIII Electric Fire Pump Controllers - Wye-Delta Open Transition Starting With Power Transfer Switch

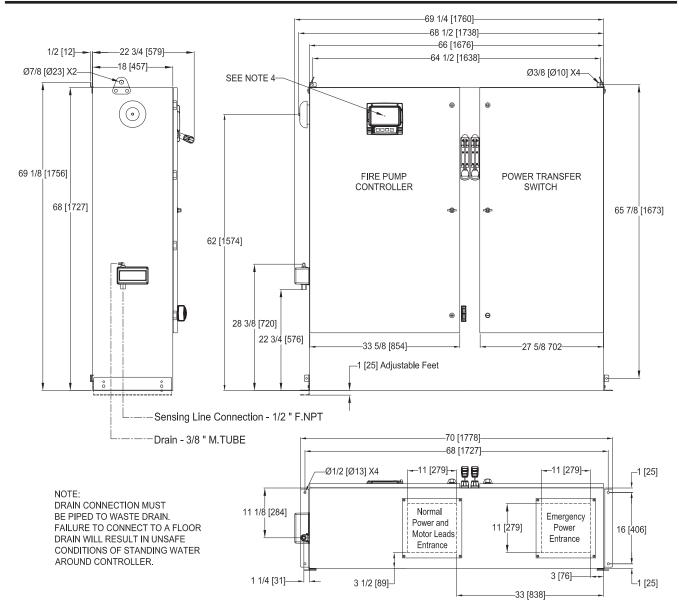

VOLTAGE/POWER TABLE						
LINE VOLTAGE	MOTOR HORSEPOWER					
208	NA					
220-240	NA					
380-400-415	350					
440-480	450					
600	NA					
APPROX SHIPPING WT: 850 [386]						

NOTES:

- 1. STANDARD: NEMA 2
- 2. STANDARD PAINT: TEXTURED RED RAL3002
- 3. ALL DIMENSIONS IN INCHES [MILLIMETERS] SHIPPING WEIGHT IN POUNDS [KG]
- 4. CENTER OF MARK III SCREEN: 61 5/8 [1564] FROM BOTTOM OF ENCLOSURE
- BOTTOM OF ENGLOSIONE
 BOTTOM CONDUIT ENTRANCE THROUGH
 REMOVABLE GLAND PLATE RECOMMENDED
- 6. USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
- 7. PROTECT EQUIPMENT AGAINST DRILLING CHIPS
- 8. DOOR SWING EQUAL TO DOOR WIDTH
- DRAWINGS FOR CONSTRUCTION PURPOSES
 MUST BE OBTAINED FROM FIRETROL OR THE LOCAL
 FIRETROL REPRESENTATIVE
- 10. SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

					RELEASED		- 1	-	CIR	CIR	5-11-20
THIRD ANGLE PROJECTION	SIZE A	BY	DATE		REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE
	DRAWN BY	CIR	5-11-20	© Firetrol, Inc. Not for construction.	DIMENSIONS & SHIPPING WEIGHT	FTA1300 WITH FTA950	DD1300-85				
		0	0 11 20		OPEN TRANSITION WYE DELTA FIRE PUMP CONTROLLER		DD 1300-63 CDL				
	F INI AL APPROVAL	CIR	5-11-20		AND POWER TRANSFER SWITCH	UIVIP CONTROLLER	DWG REV -	ECN -		SH	HEET 1 OF 1
All dots reserved. The drawho and the Information contained or depicted herein are the sole property of Fletrol. Inc. Copies are communicated to the recibient in strict confidence and may not be retransmitted, published, reproduced, copied or used in any manner, including as the basis for the manufacture or sale of any products, without the express prior written consent of Fletrol. Inc.											