




# Mark IIx6 Electric Fire Pump Controllers

# Dimensions and Shipping Weight

## FTA1350

## Wye-Delta Closed Transition Starting

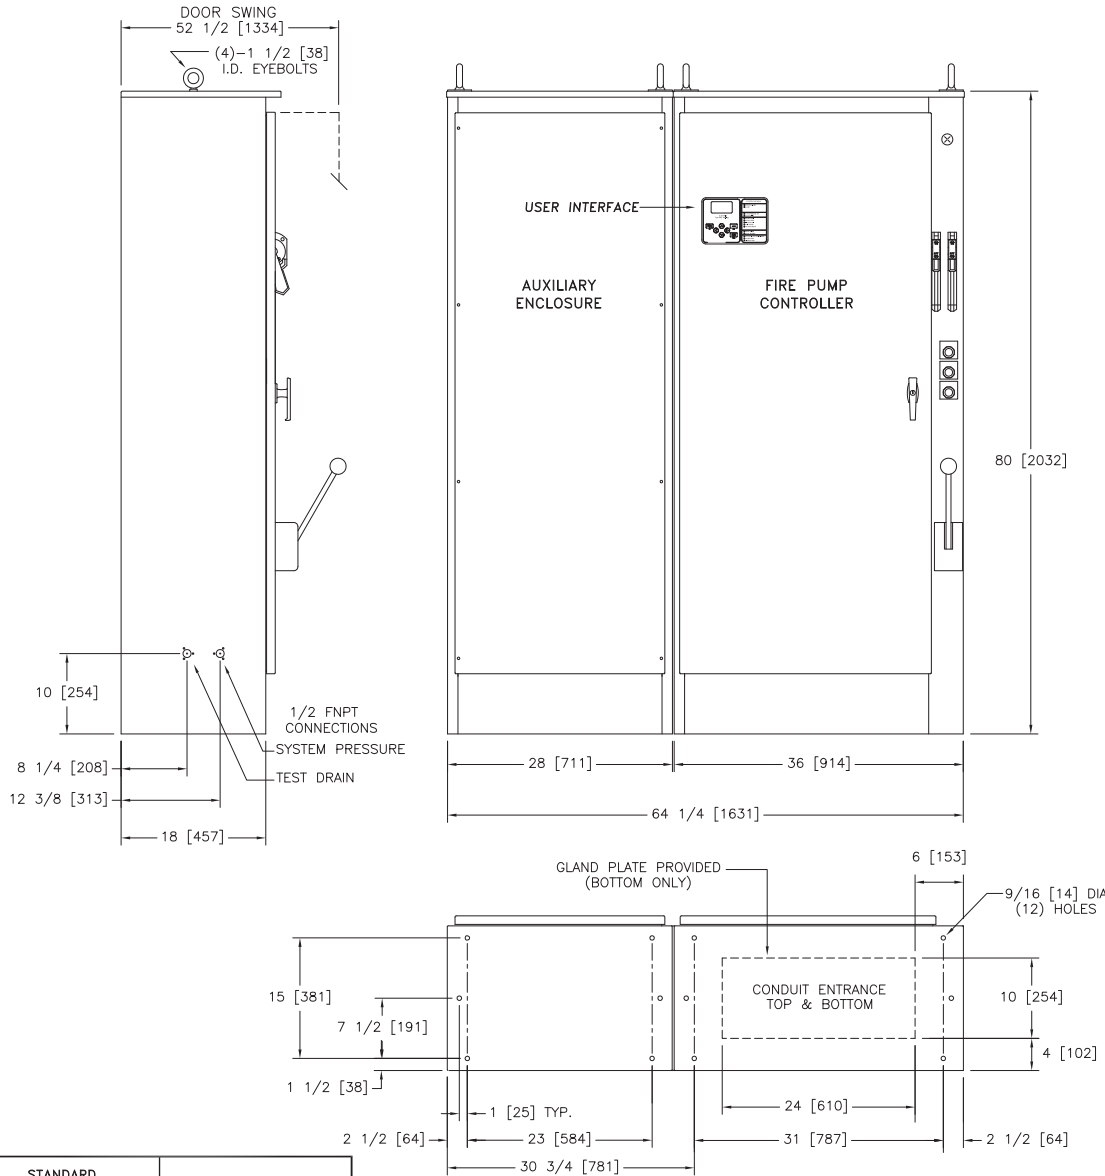

<b>STANDARD WITHSTAND RATINGS</b> 200-600V 100,000 Amps RMS Sym. <b>INTERMEDIATE WITHSTAND RATINGS</b> 200-600V 150,000 Amps RMS Sym. <b>HIGH WITHSTAND RATINGS</b> 200-600V 200,000 Amps RMS Sym.	<b>STANDARD INTERMEDIATE WITHSTAND RATINGS</b> 200-480V 65,000 Amps RMS Sym. <b>STANDARD LOW WITHSTAND RATINGS</b> 550-600V 42,000 Amps RMS Sym.
--	---

LINE VOLTAGE	MOTOR HORSEPOWER	MOTOR HORSEPOWER
200	□ 125-200	□ 250
208	□ 150-200	□ 250
220-240	□ 150-250	□ 300
380-415	□ 250-350	□ 400-500
440-480	□ 300-500	□ 600
550-600	□ 350-500	□ ---

**APPROXIMATE SHIPPING WEIGHT**  
1025 [465]

DO NOT INSTALL IN AMBIENT TEMPERATURES BELOW 41°F [5°C].

ALL DIMENSIONS -- INCHES [MM]  
SHIPPING WEIGHT -- POUNDS [KG]

THIS DIMENSION DRAWING COVERS FTA1350 CONTROLLERS AT THE HORSEPOWER, VOLTAGE AND WITHSTAND RATINGS AS LISTED IN THE TABLE. FOR OTHER HORSEPOWER OR WITHSTAND RATINGS, REFER TO ED1350-02

SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION. REQUEST CONSTRUCTION DRAWINGS FROM FIRETROL OR YOUR LOCAL FIRETROL REPRESENTATIVE.

	SIZE	A	BY	DATE
	DRAWN BY	TEF	07-24-02	
	FINAL APPROVAL	TEF	07-24-02	



© Firetrol, Inc. Not for construction. Subject to change without notice.

UPDATED TITLE BLOCK	D	280937	JMW	TEF	09-18-19
REVISED MOTOR HORSEPOWER CHART	C	237364	JMW	TEF	05-31-12
REVISION DESCRIPTION	REV	ECN NO	BY	APP	DATE
DIMENSIONS AND SHIPPING WEIGHT	DRAWING NUMBER				
CLOSED TRANSITION WYE-DELTA FIRE PUMP CONTROLLER	DD1350-60				
	DWG REV	D	ECN NO	280937	SHEET 1 OF 1