


Dimensions and Shipping Weight



FTA1350

MARK^{III}+ Electric Fire Pump Controllers - Wye-Delta Closed Transition Starting

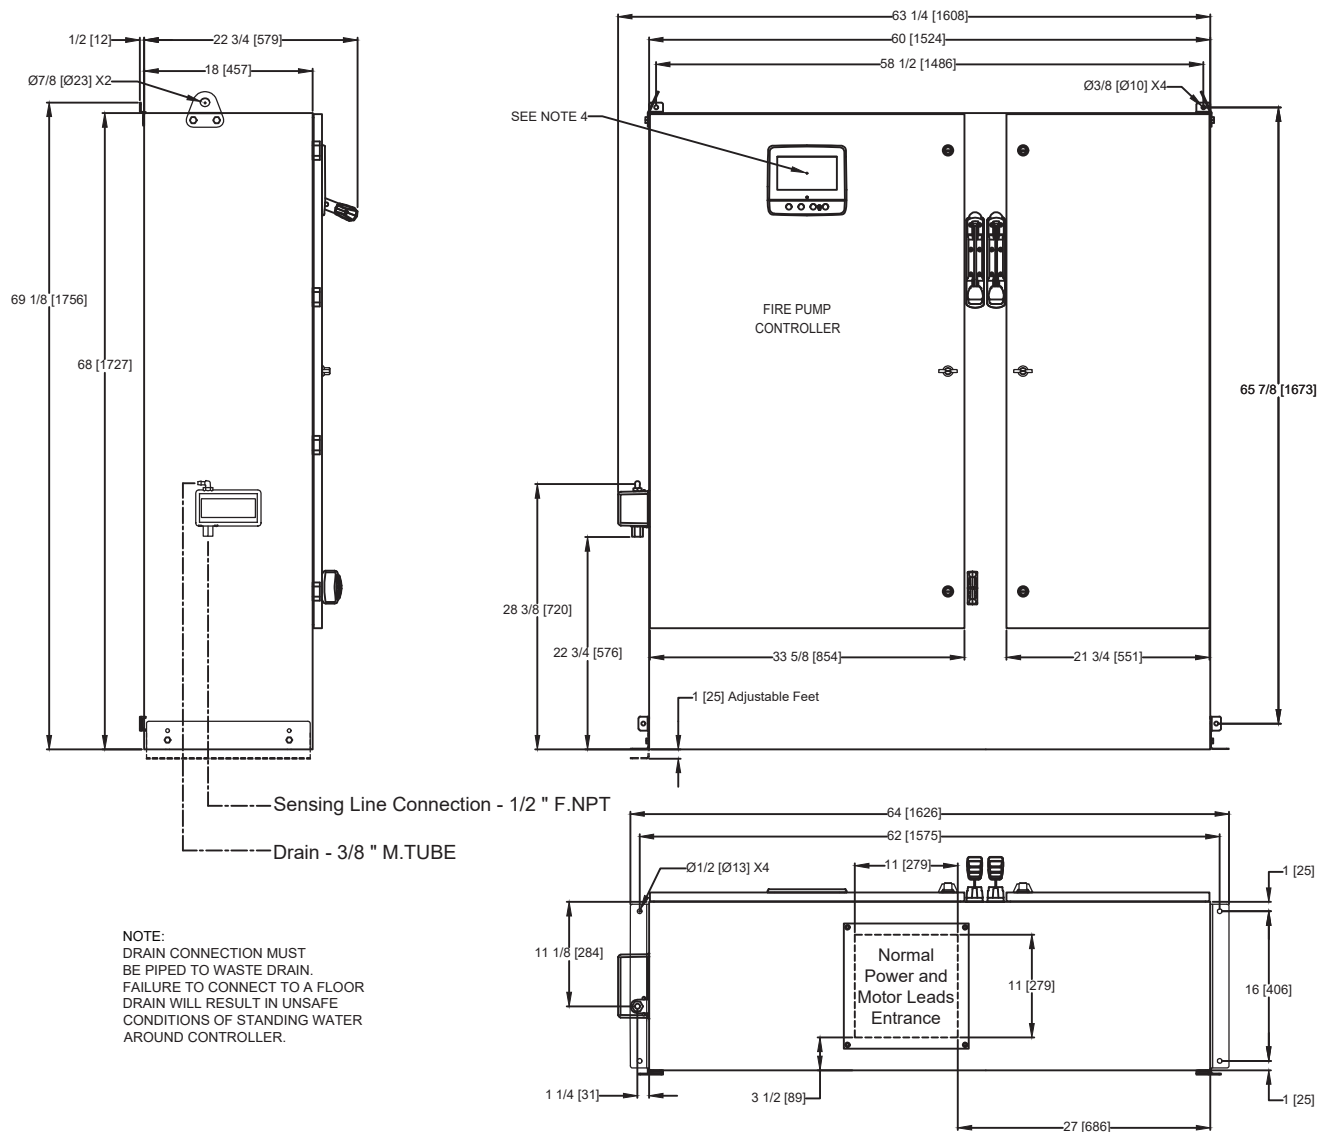

NOTE:
DRAIN CONNECTION MUST
BE PIPED TO WASTE DRAIN.
FAILURE TO CONNECT TO A FLOOR
DRAIN WILL RESULT IN UNSAFE
CONDITIONS OF STANDING WATER
AROUND CONTROLLER.

VOLTAGE/POWER TABLE

LINE VOLTAGE	MOTOR HORSEPOWER
208	NA
220-240	NA
380-400-415	350
440-480	NA
600	NA

APPROX SHIPPING WEIGHT: 850 [386]

NOTES:

- STANDARD: NEMA 2
- STANDARD PAINT: TEXTURED RED RAL3002
- ALL DIMENSIONS IN INCHES [MILLIMETERS]
SHIPPING WEIGHT IN POUNDS [KG]
- CENTER OF MARK III + SCREEN: 61 5/8 [1564] FROM BOTTOM OF ENCLOSURE
- BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
- USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
- PROTECT EQUIPMENT AGAINST DRILLING CHIPS
- DOOR SWING EQUAL TO DOOR WIDTH
- DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
- SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

REVISED POWER/VOLTAGE CHART				C				CIR				3-30-23			
REVISION DESCRIPTION				REV				ECN NO				BY			
DIMENSIONS & SHIPPING WEIGHT				FTA1350				DRAWING NUMBER				DD1350-73			
CLOSED TRANSITION WYE DELTA FIRE PUMP CONTROLLER								DWG REV				C			
								ECN NO				SHEET 1 OF 1			

All rights reserved. The drawing and the information contained or depicted herein are the sole property of Firetrol, Inc. Copies are communicated to the recipient in strict confidence and may not be retransmitted, published, reproduced, copied or used in any manner, including as the basis for the manufacture or sale of any products, without the express prior written consent of Firetrol, Inc.