



Mark IIxg Electric Fire Pump Controllers

Dimensions and Shipping Weight

FTA1500

Primary Resistor Starting

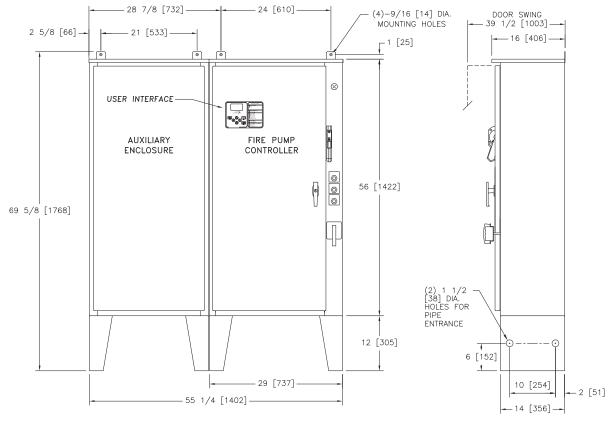

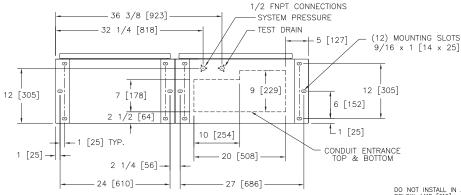

STANDARD WITHSTAND RATINGS 200-600V - 100,000 Amps RMS Sym INTERMEDIATE WITHSTAND RATINGS
200-600V - 150,000 Amps RMS Sym.
HIGH WITHSTAND RATINGS
200-600V - 200,000 Amps RMS Sym.

LINE VOLTAGE	MOTOR HORSEPOWER
200	
208	□ 125
220-240	□ 125
380-415	□ 125-200
440-480	□ 200-250
550-600	□ 200-300

DO NOT INSTALL IN AMBIENT TEMPERATURES BELOW 41°F [5°C].

ALL DIMENSIONS - INCHES [MM] SHIPPING WEIGHT - POUNDS [KG]

THIS DIMENSION DRAWING COVERS FTA1500 CONTROLLERS AT THE HORSEPOWER, VOLTAGE AND WITHSTAND RATINGS AS LISTED IN THE TABLE. FOR OTHER HORSEPOWER OR WITHSTAND RATINGS, REFER TO ED1500-02

SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION. REQUEST CONSTRUCTION DRAWINGS FROM FIRETROL OR YOUR LOCAL FIRETROL REPRESENTATIVE.

	SIZE A	BY	DATE
THIRD ANGLE PROJECTION	DRAWN BY	TEF	07-25-02
	FINAL APPROVAL	TEF	07-25-02



UPDATED TITLE BLOCK		D	281057	JMW	TEF	10-02-19
REVISED MOTOR HORSEPOWER CHART		С	237408	JMW	TEF	06-04-12
REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE
		DD1500 57				
DIMENSIONS AND SHIPPING WEIGHT	FTA1500			7		
DIMENSIONS AND SHIPPING WEIGHT PRIMARY RESISTOR FIRE PUMP CONT			NUMBER 500 - 5	7		

APPROXIMATE SHIPPING WEIGHT

500 [227]