





# Dimensions and Shipping Weight

## FTA1500 / FTA950

### Primary Resistor Starting With Power Transfer Switch

## Mark IIx6 Electric Fire Pump Controllers

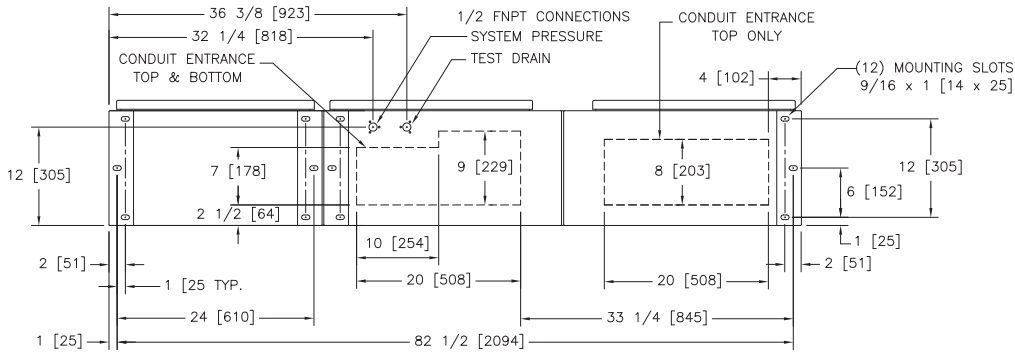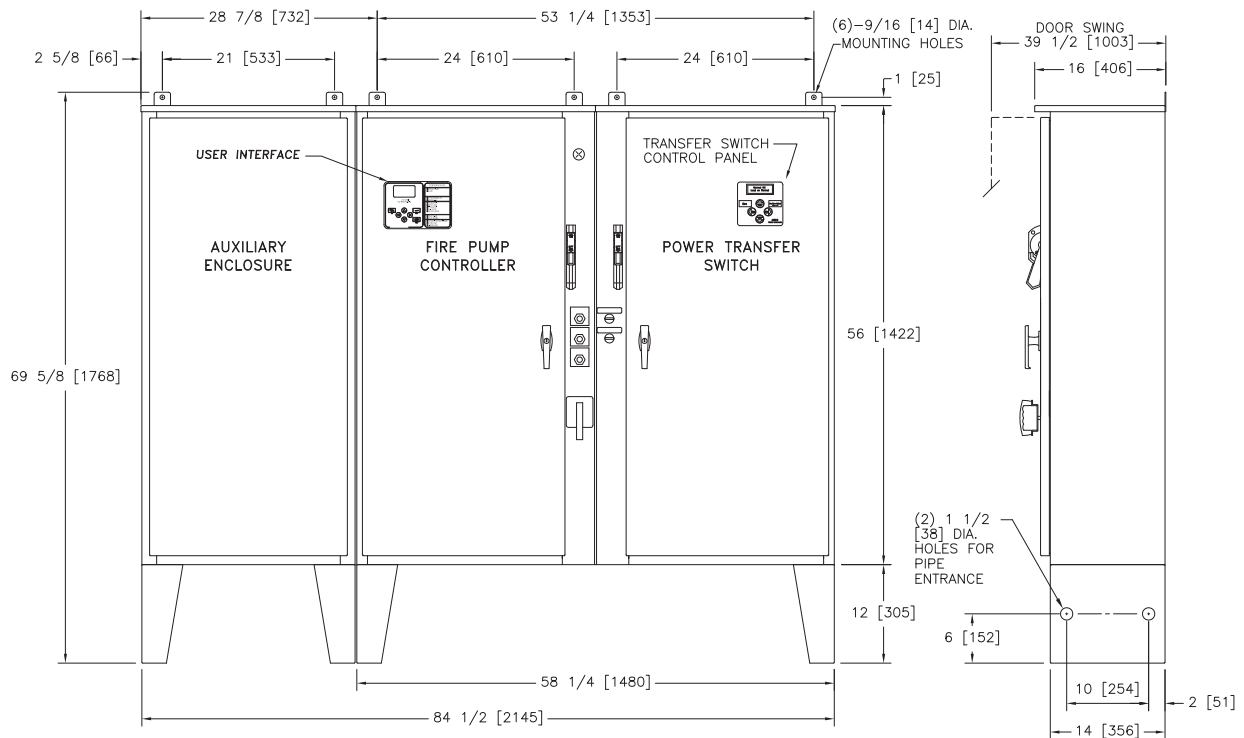

<b>STANDARD WITHSTAND RATINGS</b>	
200-600V - 100,000 Amps RMS Sym.	
<b>INTERMEDIATE WITHSTAND RATINGS</b>	
200-600V - 150,000 Amps RMS Sym.	
<b>HIGH WITHSTAND RATINGS</b>	
200-600V - 200,000 Amps RMS Sym.	
LINE VOLTAGE	MOTOR HORSEPOWER
200	□ ---
208	□ 125
220-240	□ 125
380-415	□ 125-200
440-480	□ 200-250
550-600	□ 200-300

<b>APPROXIMATE SHIPPING WEIGHT</b>
765 [347]

DO NOT INSTALL IN AMBIENT TEMPERATURES BELOW 41°F [5°C].

ALL DIMENSIONS - INCHES [MM]  
SHIPPING WEIGHT - POUNDS [KG]

THIS DIMENSION DRAWING COVERS FTA1500 CONTROLLERS AT THE HORSEPOWER, VOLTAGE AND WITHSTAND RATINGS AS LISTED IN THE TABLE. FOR OTHER HORSEPOWER OR WITHSTAND RATINGS, REFER TO ED1500-02

SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION. REQUEST CONSTRUCTION DRAWINGS FROM FIRETROL OR YOUR LOCAL FIRETROL REPRESENTATIVE.

THIRD ANGLE PROJECTION	SIZE <b>A</b>	BY	DATE
	DRAWN BY	TEF	07-24-02
	FINAL APPROVAL	TEF	07-24-02



© Firetrol, Inc. Not for construction. Subject to change without notice.

UPDATED TITLE BLOCK		D	281057	JMW	TEF	10-02-19
REVISED MOTOR HORSEPOWER CHART		C	237408	JMW	TEF	06-04-12
REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE
DIMENSIONS AND SHIPPING WEIGHT		FTA1500 WITH FTA950		DRAWING NUMBER		
PRIMARY RESISTOR FIRE PUMP CONTROLLER WITH POWER TRANSFER SWITCH		DD1500-64				
DWG REV	D	ECN NO	281057	SHEET 1 OF 1		