


Dimensions and Shipping Weight



FTA1800

MARK^{III} Electric Fire Pump Controllers - Autotransformer Starting

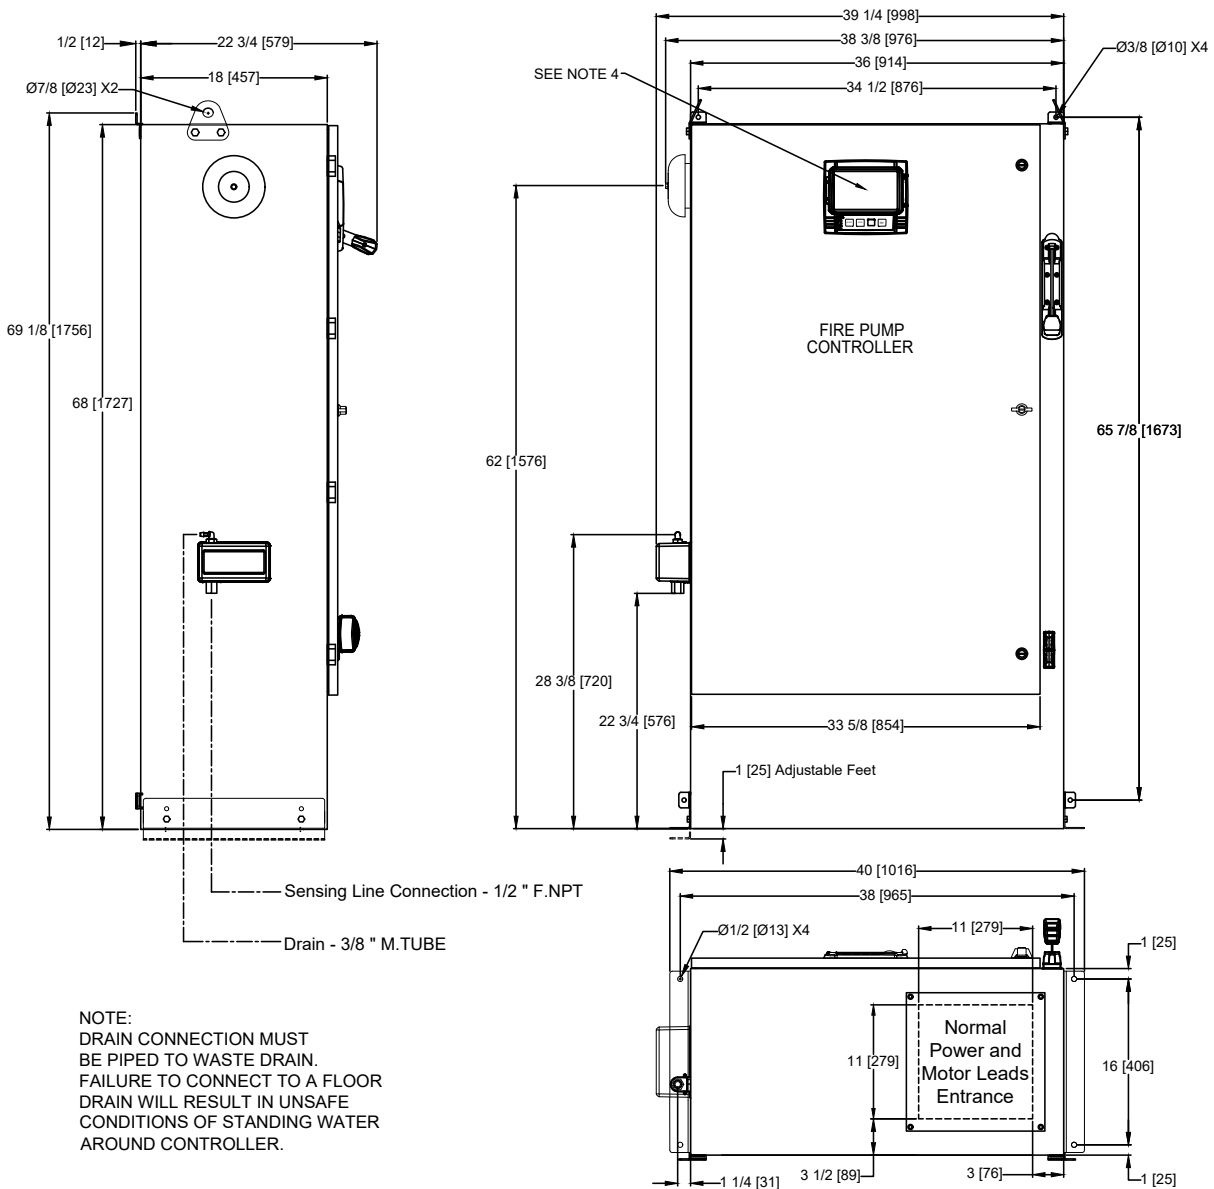

VOLTAGE/POWER TABLE	
LINE VOLTAGE	MOTOR HORSEPOWER
208	75-150
220-240	100-200
380-400-415	150-300
440-480	200-450
600	250-500
APPROX SHIPPING WEIGHT: 765 [347]	

NOTES:

- STANDARD: NEMA 2
- STANDARD PAINT: TEXTURED RED RAL3002
- ALL DIMENSIONS IN INCHES [MILLIMETERS] SHIPPING WEIGHT IN POUNDS [KG]
- CENTER OF MARK III SCREEN: 61 5/8 [1564] FROM BOTTOM OF ENCLOSURE
- BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
- USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
- PROTECT EQUIPMENT AGAINST DRILLING CHIPS
- DOOR SWING EQUAL TO DOOR WIDTH
- DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
- SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

REVISED VOLTAGE/HP CHART				A	-	CIR	CIR	1-21-21
REVISION DESCRIPTION				REV	ECN NO	BY	APP	DATE
DIMENSIONS & SHIPPING WEIGHT				FTA1800		DRAWING NUMBER		
AUTOTRANSFORMER FIRE PUMP CONTROLLER				DD1800-72		CDL		
DWG REV A				ECN NO -		SHEET 1 OF 1		