


MARKIII Electric Fire Pump Controllers - Autotransformer Starting

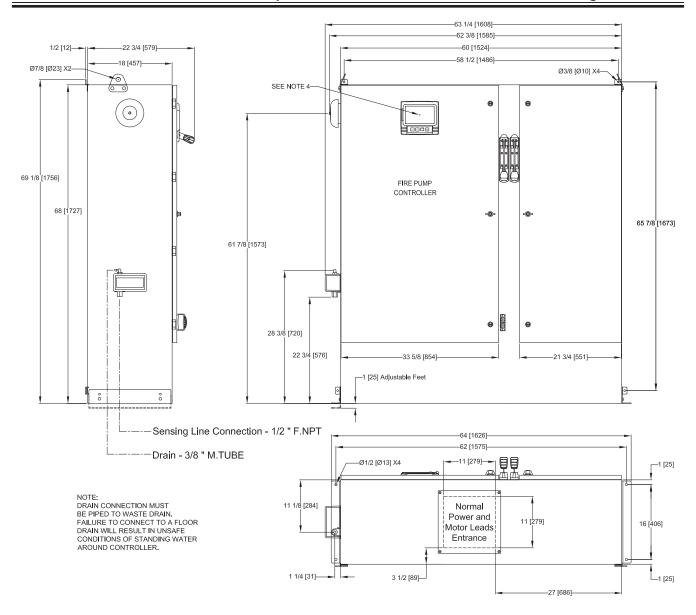

VOLTAGE/POWER TABLE						
LINE VOLTAGE	MOTOR HORSEPOWER					
208	200					
220-240	250					
380-400-415	350-450					
440-480	500					
600	NA					
APPROX SHIPPING WT: 850 [386]						

NOTES:

- 1. STANDARD: NEMA 2
- 2. STANDARD PAINT: TEXTURED RED RAL3002
- 3. ALL DIMENSIONS IN INCHES [MILLIMETERS] SHIPPING WEIGHT IN POUNDS [KG]
- 4. CENTER OF MARK III SCREEN: 61 5/8 [1564] FROM BOTTOM OF ENCLOSURE
- 5. BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
- 6. USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
- 7. PROTECT EQUIPMENT AGAINST DRILLING CHIPS
- 8. DOOR SWING EQUAL TO DOOR WIDTH
- 9. DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
- 10. SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

					REVISED VOLTAGE/POWER CHART		Α	-	CIR	CIR	5-12-20
THIRD ANGLE PROJECTION	SIZE A	BY	DATE		REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE
	DRAWN BY	CIR	CIR 11-5-19		DIMENSIONS & SHIPPING WEIGHT	FTA1800	DD1800-73				
		OIIX III II			AUTOTRANSFORMER FIRE PUMP CONTROLLER		DD 1800-73 CDL				
	F IN AL APPROVAL	CIR	11-5-19	© Firetrol, Inc. Not for construction. Subject to change without notice.			DWG A	ECN -		SH	HEET 1 OF 1