



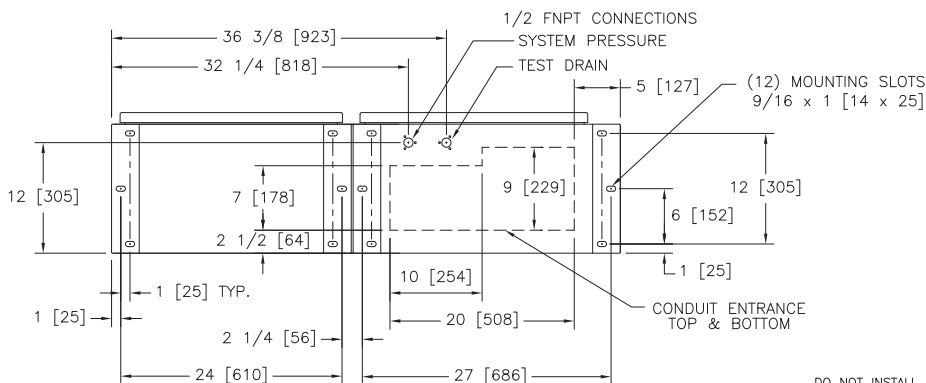

Mark IIxG Electric Fire Pump Controllers

Dimensions and Shipping Weight FTA1930 Digital Solid State Reduced Current Starting

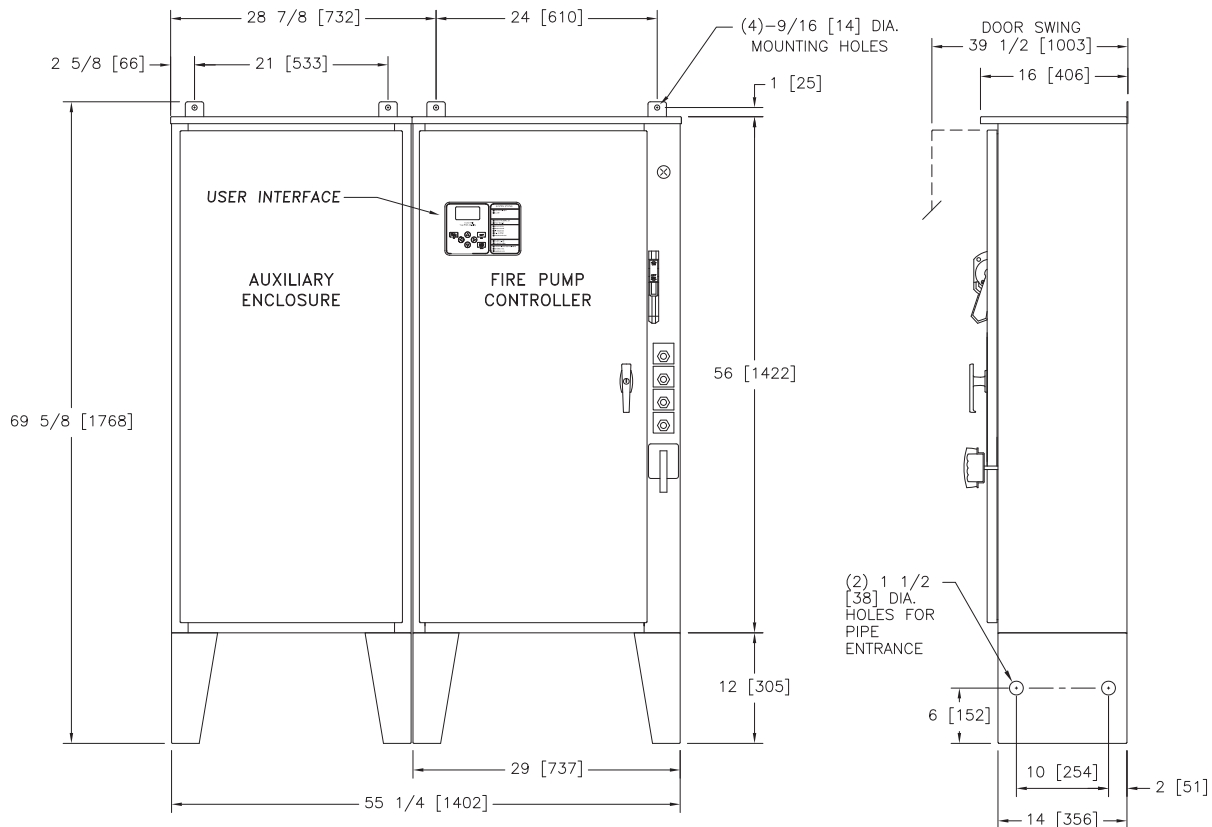

STANDARD WITHSTAND RATINGS
200–600V – 100,000 Amps RMS Sym.
INTERMEDIATE WITHSTAND RATINGS
200–600V – 150,000 Amps RMS Sym.
HIGH WITHSTAND RATINGS
200–600V – 200,000 Amps RMS Sym.

LINE VOLTAGE	MOTOR HORSEPOWER
200	□ 75–100
208	□ 75–125
220–240	□ 75–125
380–415	□ 125–200
440–480	□ 200–250
550–600	□ 200–300

APPROXIMATE SHIPPING WEIGHT
520 [236]

DO NOT INSTALL IN AMBIENT TEMPERATURES BELOW 41°F [5°C].

ALL DIMENSIONS – INCHES [MM]
SHIPPING WEIGHT – POUNDS [KG]

THIS DIMENSION DRAWING COVERS FTA1930 CONTROLLERS AT THE HORSEPOWER, VOLTAGE AND WITHSTAND RATINGS AS LISTED IN THE TABLE. FOR OTHER HORSEPOWER OR WITHSTAND RATINGS, REFER TO ED1930-02

SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION. REQUEST CONSTRUCTION DRAWINGS FROM FIRETROL OR YOUR LOCAL

THIRD ANGLE PROJECTION	SIZE A	BY	DATE
DRAWN BY	TEF	05-29-08	
FINAL APPROVAL	TEF	05-29-08	



© Firetrol, Inc. Not for construction.
Subject to change without notice.

UPDATED TITLE BLOCK	D	281239	JMW	TEF	10-07-19
REVISED MOTOR HORSEPOWER CHART	C	237408	JMW	TEF	06-04-12
REVISION DESCRIPTION	REV	ECN NO	BY	APP	DATE
DIMENSIONS AND SHIPPING WEIGHT	FTA1930				
DIGITAL SOLID STATE REDUCED CURRENT FIRE PUMP CONTROLLER					
DWG REV D	ECN NO 281239				
					SHEET 1 OF 1

All rights reserved. The drawing and the information contained or depicted herein are the sole property of Firetrol, Inc. Copies are communicated to the recipient in strict confidence and may not be retransmitted, published, reproduced, copied or used in any manner, including as the basis for the manufacture or sale of any products, without the express prior written consent of Firetrol, Inc.