



## Mark Ilxg Electric Fire Pump Controllers

## Dimensions and Shipping Weight

FTA1930 / FTA950
Digital Solid State Reduced Voltage Starting With Power Transfer Switch

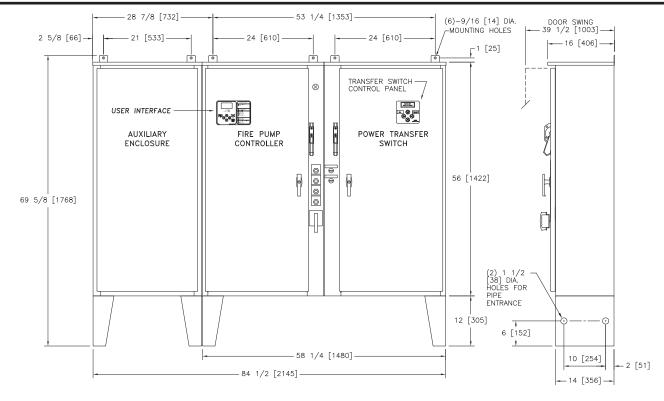

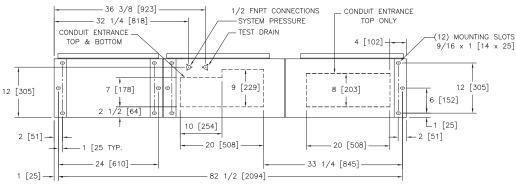

STANDARD WITHSTAND RATINGS 200-600V - 100,000 Amps RMS Sym INTERMEDIATE WITHSTAND RATINGS 200-600V - 150,000 Amps RMS Sym. HIGH WITHSTAND RATINGS

200-000V - 200,000 Amps KWS Sym.					
LINE VOLTAGE	MOTOR HORSEPOWER				
200	□ 75-100				
208	□ 75-125				
220-240	□ 75-125				
380-415	□ 125-200				
440-480	□ 200-250				
550-600	□ 200-300				

DO NOT INSTALL IN AMBIENT TEMPERATURES BELOW 41°F [5°C].

ALL DIMENSIONS - INCHES [MM] SHIPPING WEIGHT - POUNDS [KG]

THIS DIMENSION DRAWING COVERS FTA1930 CONTROLLERS AT THE HORSEPOWER, VOLTAGE AND WITHSTAND RATINGS AS LISTED IN THE TABLE. FOR OTHER HORSEPOWER OR WITHSTAND RATINGS, REFER TO ED1930-02

SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION. REQUEST CONSTRUCTION DRAWINGS FROM FIRETROL OR YOUR LOCAL FIRETROL REPRESENTATIVE.

APPROXIMATE SHIPPING WEIGHT 760 [345]

THIRD ANGLE	SIZE A	BY	DATE
	DRAWN BY	TEF	06-08-08
PROJECTION	FINAL APPROVAL	TEF	06-08-08



UPDATED TITLE BLOCK		D	281239	JMW	TEF	10-07-19	
REVISED MOTOR HORSEPOWER CHART		С	237408	JMW	TEF	06-04-12	
REVISION DESCRIPTION		REV	ECN NO	BY	APP	DATE	
DIMENSIONS AND SHIPPING WEIGHT	FTA1930 WITH FTA950		DD1930-64				
DIGITAL COLUD OTATE DEPLICED CUIDDENT FIDE DUMP CONTROLLED		DD 1930 <b>-</b> 04					
DIGITAL SOLID STATE REDUCED CURRENT FIRE PUMP CONTROLLER WITH POWER TRANSFER SWITCH		DWG D	ECN 28	1239	SI	HEET 1 OF 1	