


# Dimensions and Shipping Weight



FTA1930

## MARK<sup>III</sup> Electric Fire Pump Controllers – Solid State Reduced Current Starting

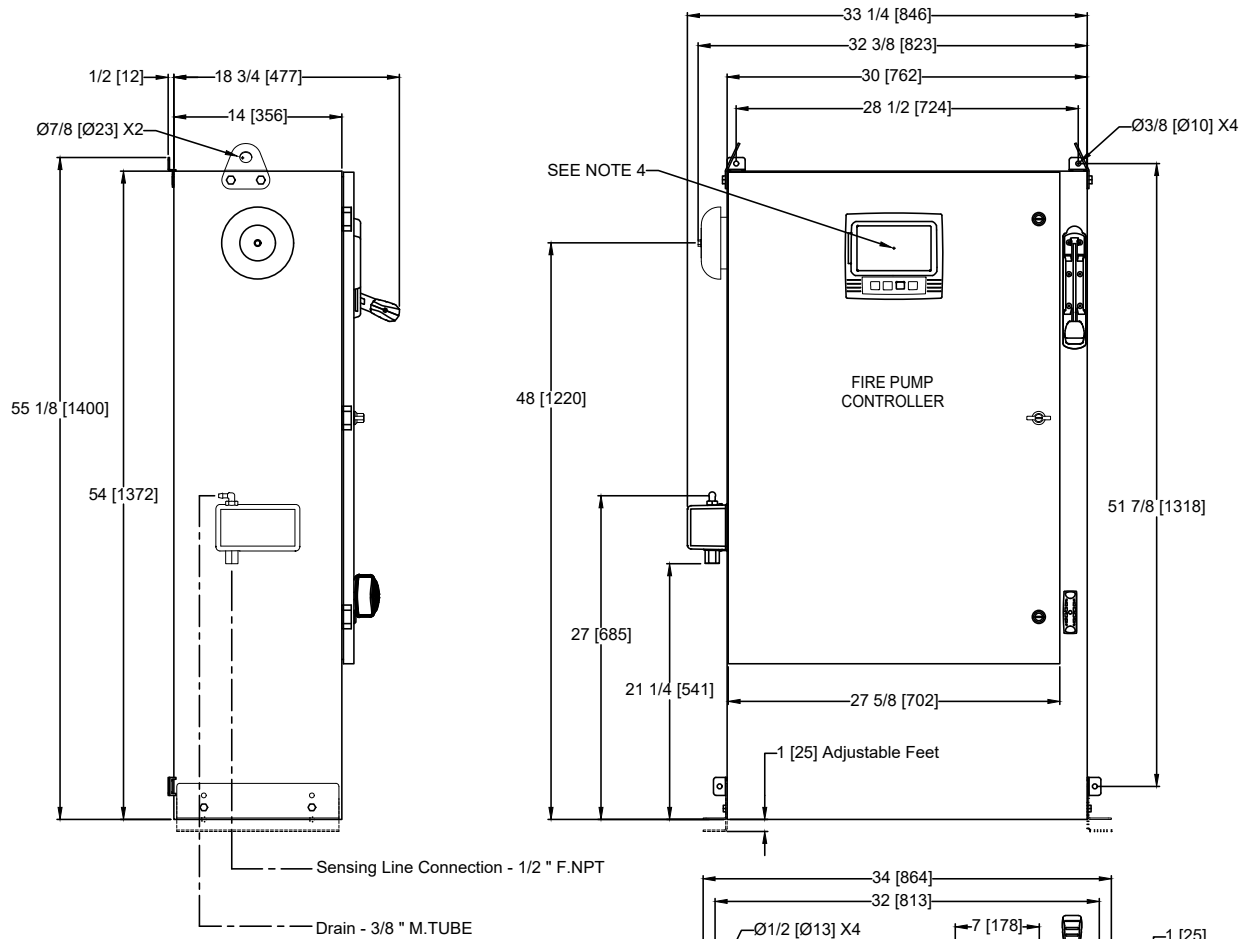

NOTE:  
DRAIN CONNECTION MUST BE PIPED TO WASTE DRAIN. FAILURE TO CONNECT TO A FLOOR DRAIN WILL RESULT IN UNSAFE CONDITIONS OF STANDING WATER AROUND CONTROLLER.

VOLTAGE/POWER TABLE	
LINE VOLTAGE	MOTOR HORSEPOWER
208	40-60
220-240	40-75
380-400-415	75-125
440-480	75-150
600	100-200
APPROX SHIPPING WEIGHT: 290 [132]	

- NOTES:
- STANDARD: NEMA 2
  - STANDARD PAINT: TEXTURED RED RAL3002
  - ALL DIMENSIONS IN INCHES [MILLIMETERS] SHIPPING WEIGHT IN POUNDS [KG]
  - CENTER OF MARK III SCREEN: 47 5/8 [1208] FROM BOTTOM OF ENCLOSURE
  - BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
  - USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
  - PROTECT EQUIPMENT AGAINST DRILLING CHIPS
  - DOOR SWING EQUAL TO DOOR WIDTH
  - DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
  - SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

REVISED VOLTAGE/HP CHART				A	-	CIR	CIR	1-21-21
REVISION DESCRIPTION				REV	ECN NO	BY	APP	DATE
DIMENSIONS & SHIPPING WEIGHT				FTA1930		DRAWING NUMBER		
DIGITAL SOLID STATE REDUCED CURRENT FIRE PUMP CONTROLLER				DD1930-71		CDL		
DWG REV A				ECN NO -		SHEET 1 OF 1		