


# Dimensions and Shipping Weight




FTA1930/950

## MARK<sup>III</sup> Electric Fire Pump Controllers - Solid State Reduced Current Starting With Power Transfer Switch

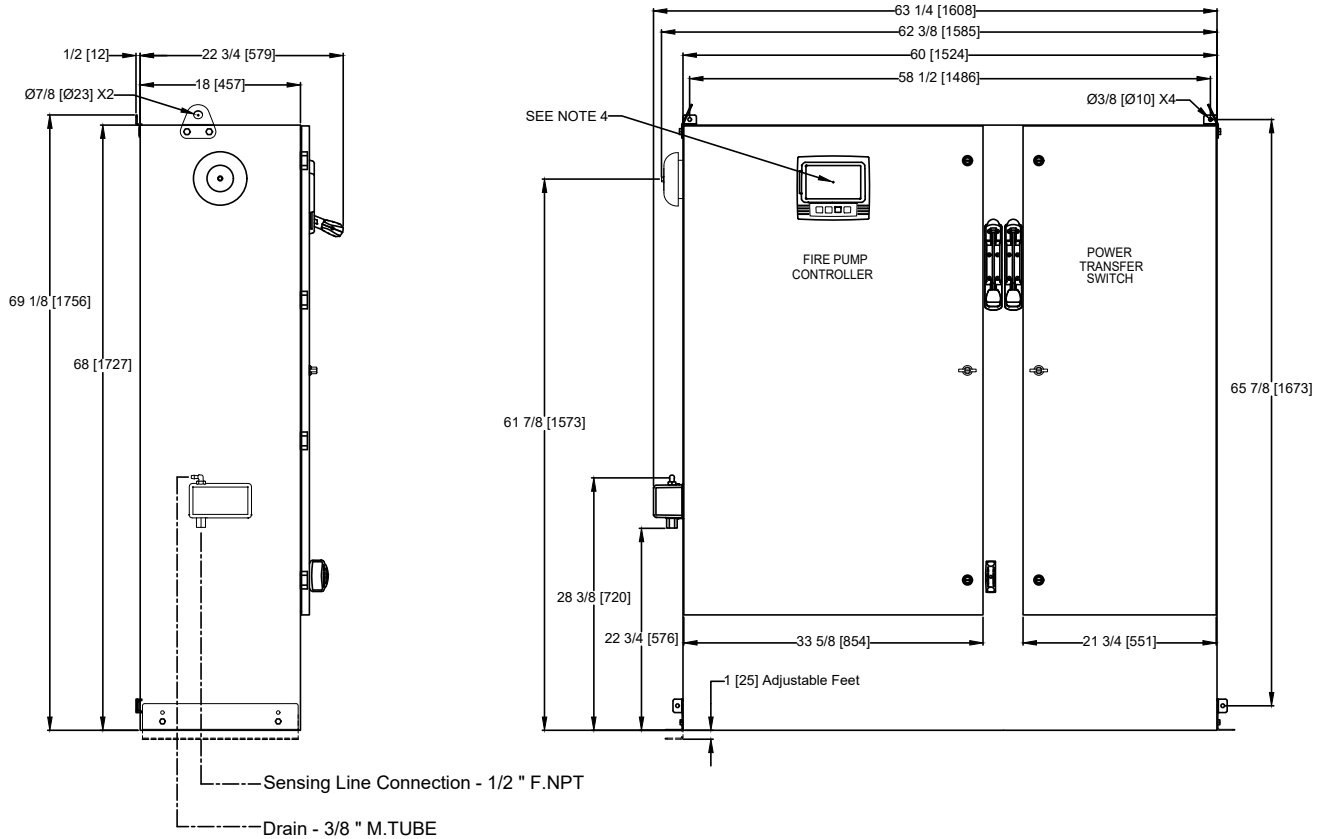

NOTE:  
DRAIN CONNECTION MUST BE PIPED TO WASTE DRAIN. FAILURE TO CONNECT TO A FLOOR DRAIN WILL RESULT IN UNSAFE CONDITIONS OF STANDING WATER AROUND CONTROLLER.

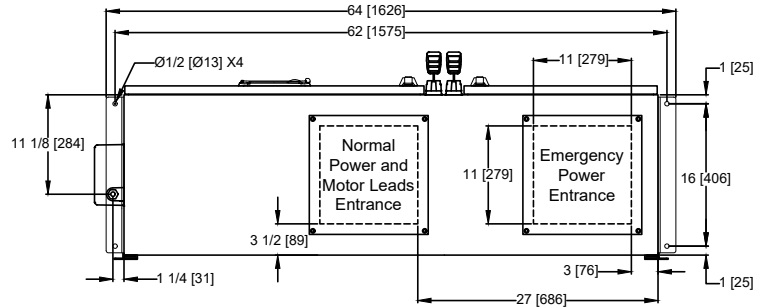

VOLTAGE/POWER TABLE	
LINE VOLTAGE	MOTOR HORSEPOWER
208	75-100
220-240	100-125
380-400-415	150-200
440-480	200-250
600	250-350
APPROX SHIPPING WT: 800 [363]	

- NOTES:
- STANDARD: NEMA 2
  - STANDARD PAINT: TEXTURED RED RAL3002
  - ALL DIMENSIONS IN INCHES [MILLIMETERS]  
SHIPPING WEIGHT IN POUNDS [KG]
  - CENTER OF MARK III SCREEN: 61 5/8 [1564] FROM BOTTOM OF ENCLOSURE
  - BOTTOM CONDUIT ENTRANCE THROUGH REMOVABLE GLAND PLATE RECOMMENDED
  - USE WATERTIGHT CONDUIT AND CONNECTOR ONLY
  - PROTECT EQUIPMENT AGAINST DRILLING CHIPS
  - DOOR SWING EQUAL TO DOOR WIDTH
  - DRAWINGS FOR CONSTRUCTION PURPOSES MUST BE OBTAINED FROM FIRETROL OR THE LOCAL FIRETROL REPRESENTATIVE
  - SEISMIC MOUNTING TO BE RIGID WALL AND BASE ONLY

	SIZE <b>A</b>	BY	DATE	<p>© Firetrol, Inc. Not for construction. Subject to change without notice.</p>	REVISED VOLTAGE/HP CHART		B	-	CIR	CIR	2-3-21	
	DRAWN BY	CIR	11-5-19		REVISION DESCRIPTION	REV	ECN NO	BY	APP	DATE		
	FINAL APPROVAL	CIR	11-5-19		DIMENSIONS & SHIPPING WEIGHT	FTA1930 WITH FTA950	DRAWING NUMBER		DD1930-82		CDL	
					DIGITAL SOLID STATE REDUCED CURRENT FIRE PUMP CONTROLLER AND POWER TRANSFER SWITCH		DWG REV	B	ECN NO	-	SHEET 1 OF 1	

All rights reserved. The drawing and the information contained or depicted herein are the sole property of Firetrol, Inc. Copies are communicated to the recipient in strict confidence and may not be retransmitted, published, reproduced, copied or used in any manner, including as the basis for the manufacture or sale of any products, without the express prior written consent of Firetrol, Inc.