

ELECTRIC FIRE PUMP CONTROLLER WITH AUTOMATIC TRANSFER SWITCH

FTA3100S / FTA3130S + TSA


BUILT TO THE LATEST EDITION OF THE NFPA20 & NFPA70






PROJECTION

THIRD ANGLE |DD31X0S-812/E DWG REV. 0 SHEET 1 OF 1

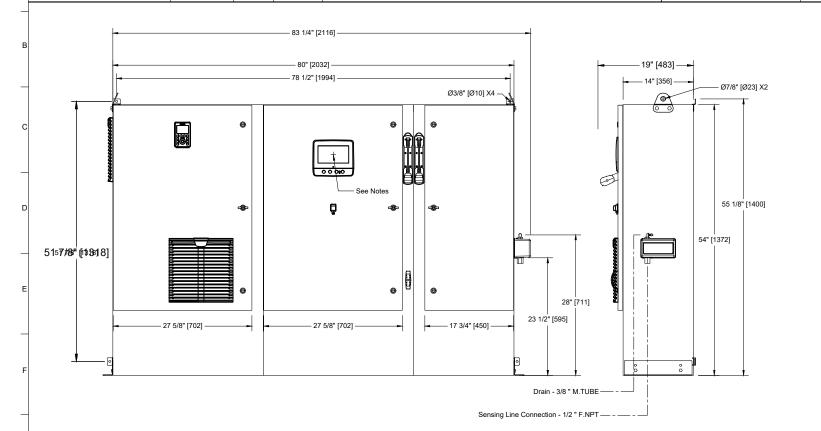

| Voltage / Power Table | | |
|-----------------------|--------|--------|
| Voltage | Min HP | Max HP |
| 200 - 240 | 10 | 30 |
| 380 - 400 - 415 | 10 | 40 |
| 440 - 480 | 15 | 50 |
| 600 | 5 | 60 |

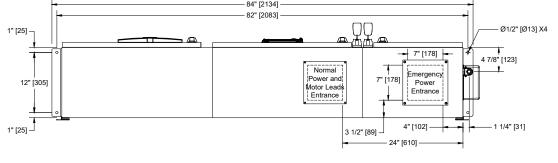

Notes:

- Standard: NEMA 12
- Standard paint : textured red RAL 3002.
- All dimensions are in inches [millimeters].
- Center of screen: 29-5/8" [751] from bottom (no feet).
- Bottom conduit entrance through removable gland plate recommended.
- Use watertight conduit and connector only.
- Protect equipment against drilling chips.
- Door swing equal to door width.